



F130-CB

WEIGHT: 20g (APPROX)


Typical Applications 用途

Office Equipment : Inkjet Printer

辦公設備：噴墨打印機

OA機器：インクジェットプリンター

Model	Wave	Count Per Revolution	Jitter	Input Voltage Vcc	Sensor	Output Voltage		Phase Difference
					Response Freq. 3.3V(Vcc) KHz	High Level V	Low Level V	Rising, Falling Degrees
F130-CB	Dual Analog Channels	32 CPR	10% Max.	3.3±10%	10 Max.	2.4 Min.	0.6 Max.	90°±45°

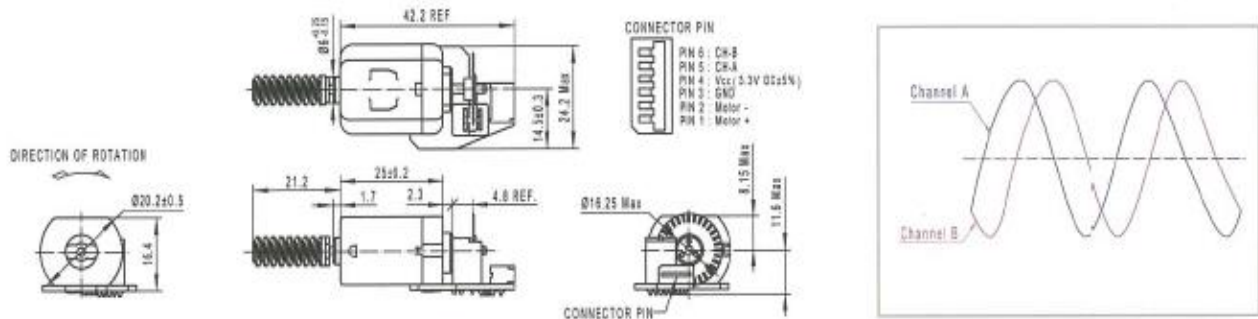

FN20-KB

WEIGHT: 7g (APPROX)

Typical Applications 用途

Office Equipment : Inkjet Printer

辦公設備：噴墨打印機

OA機器：インクジェットプリンター

Model	Wave	Count Per Revolution	Jitter	Input Voltage Vcc	Sensor	Output Voltage		Phase Difference
					Response Freq. 3.3V(Vcc) KHz	High Level V	Low Level V	Rising, Falling Degrees
FN20-KB	Dual Analog Channels	22 CPR	10% Max.	3.3±10%	10 Max.	2.4 Min.	0.6 Max.	90°±45°

